



## Description

The SW218V is a rectangular double 2x18" vented and cavity coupled subbass cabinet. It has been designed for all kind sound reinforcement, short, medium or long throw. The response given with this subwoofer is very deep and punchy, starting at 38 Hz. The cabinet is made of birch plywood, painted in a weather proof texture black finish, incorporating castors as standard. The cabinet has been tuned using the latest cad

## Applications

Design file applications : all kind of subbass reinforcement.

### TECHNICAL SPECIFICATIONS


Frequency Response (Hz)	38 Hz-200Hz
Power Handling (Watts)	1600 W RMS
Sensitivity	104 dB (1w/1m)
Nominal peak	136 dB
Coverage angle	N/A
Crossover	up to 200 Hz
Impedance	4 Ohm
Drivers	2X18"
Connectors	2x4pin speakon
Dimensions	108x58x83 cm(H x W x D)
Weight	85 Kg



Active PC  
version  
available

DIAGRAMS

GRAVES1 UNIDAD  
POTENCIA 1W

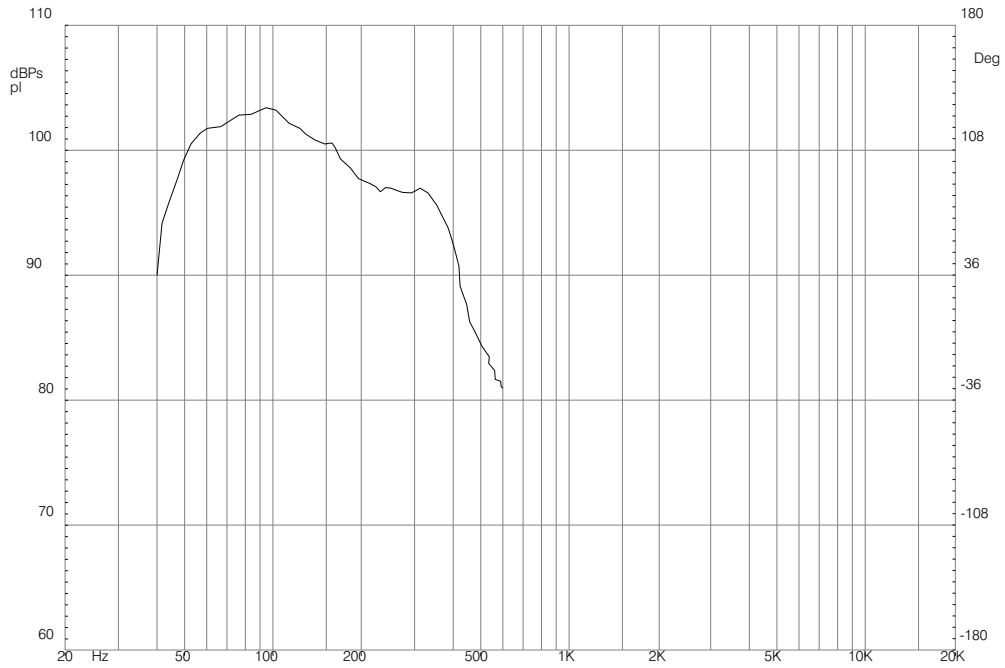

FREQUENCY RESPONSE CURVE



tecnaRE  
sound systems

Is a™ Designed and  
manufactured in Spain by



exclusivas electroacústicas s.a.

Pº Ind. Monte Boyal. C/Encinar 282  
45950 Casarrubios del Monte (Toledo). SPAIN.  
Phone: +34 918 170 110  
Fax: +34 918 183 053  
www.tecnare.com  
exel@tecnare.com